

PRH8D43



FEATURES 特点

- * Excellent solderability and high heat resistance
良好的可焊性和高耐热性


APPLICATION 用途

- * DC / DC 转换器

MEASURING FREQUENCY 测试频率

- * 100KHz 0.3V

Shapes And Dimensions 外形及尺寸示意图

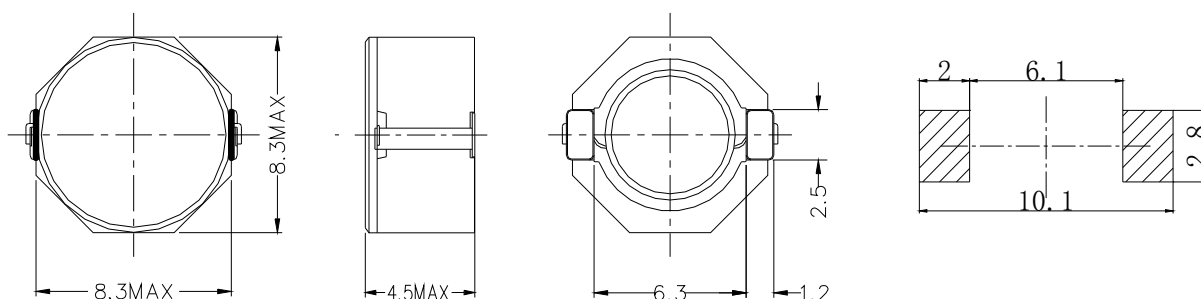

Electrical Characteristics 电气性能

Type 型號	Indicate 表示	Inductance 電感值	D.C.R(Max) 直流電阻(mΩ)	Rated Current(Max) 額定電流(A)
PRH8D4 3-2R0	2R0	2.0μH±30%	14(11)	7.00
PRH8D4 3-3R9	3R9	3.9μH±30%	18.7(15)	5.90
PRH8D4 3-4R7	4R7	4.7μH±30%	21.2(17)	5.60
PRH8D4 3-6R8	6R8	6.8μH±30%	25(20)	4.40
PRH8D4 3-100	100	10μH±30%	36(29)	4.00
PRH8D4 3-150	150	15μH±30%	52(42)	2.90
PRH8D4 3-220	220	22μH±30%	75(60)	2.60
PRH8D4 3-330	330	33μH±30%	125(100)	2.20
PRH8D4 3-470	470	47μH±30%	150(120)	1.80
PRH8D4 3-680	680	68μH±30%	237(190)	1.50
PRH8D4 3-101	101	100μH±30%	360(290)	1.30

* SPQ:1000PCS/REEL